



Transcon Conveyor

8824 Twinbrook Road Mentor, OH 44060
(440) 255-7600
www.transconconveyor.com

Booth
113



This style of conveyor can accommodate any size and weight parts on belt widths up to 72 inches or wider.

- Variable belting surface area and heat sink capabilities to suit your specific requirements.
- Bar Belts provide a flat surface for parts, with variable gaps between bars and open spaces.
- Belt components designed to accommodate differential heat expansion without warping.
- Roller supports under belt prevent belt sagging.
- Customizable Rail Guards.
- Insulation panels reduce heat damage to the conveyor frame and belt chain.
- Air take-ups accommodate expansion and contraction of the belt without constant manual adjustment.

Bar Belt Conveyor



Piggy-Back Conveyor



Transcon's Piggy-Back design integrates two conveyors, one mounted above the other.

- Loading and discharge locations at different heights for parts and scrap.
- Integrated diverter chutes.
- Shaft mounted drives with internal take-ups.
- Specific-point belt reinforcement plates with perforations.




Transcon Conveyor

8824 Twinbrook Road Mentor, OH 44060
(440) 255-7600
www.transconconveyor.com

Booth
113



Continuous Radius Belt

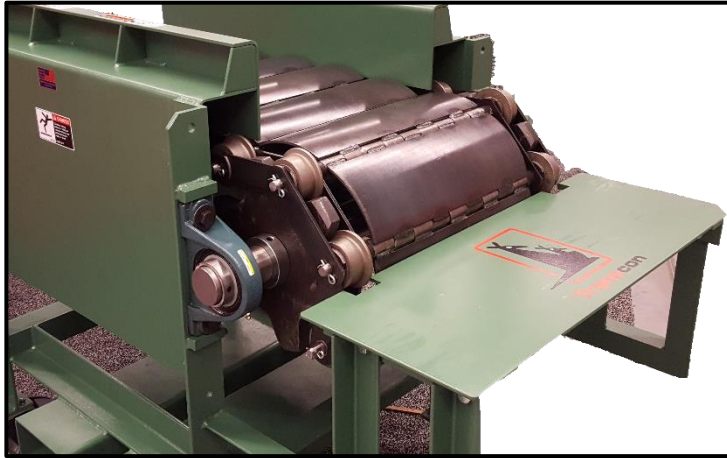

Transcon's continuous radius belt eliminates the pinch point at the end of a transfer conveyor, reducing the risk that your parts jam, or transfer tongs catch between the belt and the catch-pan.

